
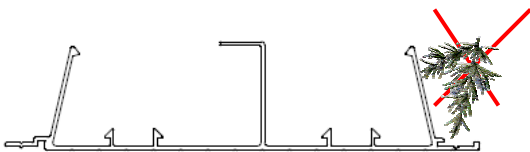


## Unloading & Jobsite Storage

All products should be stored on-top evenly spaced support blocks and on a level plane / flat surface; do not exceed 4' on-center and do not stack above 3' feet.

DO NOT stack multiple bundles.

DO NOT store varying profiles within the same stack. To properly stack, mate neighboring boards Face-to-Face and Water Channel-to-Water Channel.

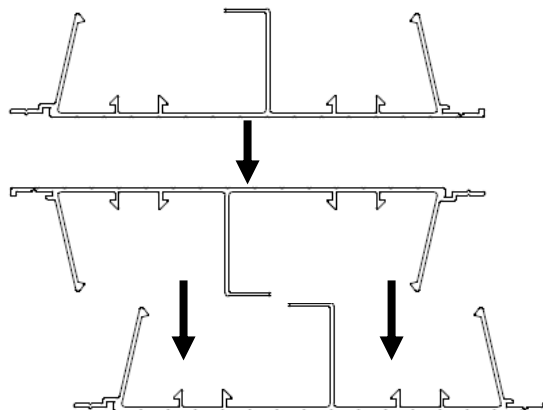

Keep the "Face" protected from abrasions and rough surfaces. DO NOT handle or drag in a manner where the "Face" could become scratched.

DO NOT stack unsheathed DryJoists or allow grit such as sand to become wedged in-between the Faces of two boards. For storage, cover products and keep free of debris.

## Safety

As with any project, you should use the proper safety equipment and wear protective clothing. Be sure to always wear safety glasses and gloves throughout the entire installation. It is good practice to take precautionary measures when lifting or moving DryJoists and to use hearing protection when cutting the product or securing components.

**\*Please Note:** As with all construction projects, if normal safety precautions are overlooked or ignored, personal injury may result – your personal safety is your responsibility.



### WARNING:

DO NOT walk on DryJoist until the installation is complete and all profiles have been secured to the frame.

### CAUTION:

For installation purposes, products become slippery when wet.